




SPREY POLİÜRETAN & POLİÜREA İZOLASYON SİSTEMLERİ



İZOKİM®

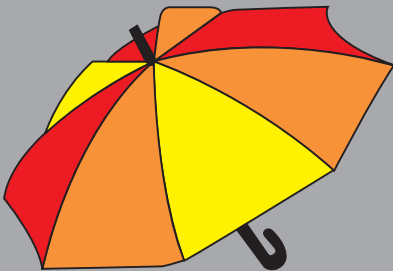

İZOKİM® SPF

TANK & BORU İZOLASYONU

Tank & Pipe insulation

İZOKİM SPF poliüretan enjeksiyon sisteminde, öncelikle izolasyonu yapılacak tank veya boru üzerine bir dış ceket giydirilir. İzolasyonu yapılacak tank veya boru ile ceket arasına İZOKİM SPF poliüretan enjekte edilir. Bu uygulama sırasında elde edilen monoblok gövde sayesinde oluşabilecek ısı köprüleri ve ısı transferleri engellenir. Uygulamada poliüretan yüzeye yapıştığı için yüzeyin hava temasını keserek korozyona engel olur. Ayrıca, dış mekanik darbelere karşı ek bir mukavemet sağlar.

In İZOKİM SPF polyurethane system, firstly the tank or pipe, which will be insulated, is covered with a metal outer coat. İZOKİM SPF polyurethane is injected between the tank or pipe and the coat. Thanks to the mono-block body obtained during this application, thermal bridges and heat transfers which may occur are prevented. Since the polyurethane adheres to the surface in the application, it eliminates the air contact of the surface and thus prevents corrosion. Furthermore, an additional resistance is ensured against external mechanical impacts.

